




# Motorola XOOM 2 Media Edition Battery Replacement

Replace your dead battery, returning the tablet to a functional state.

Written By: Taylor

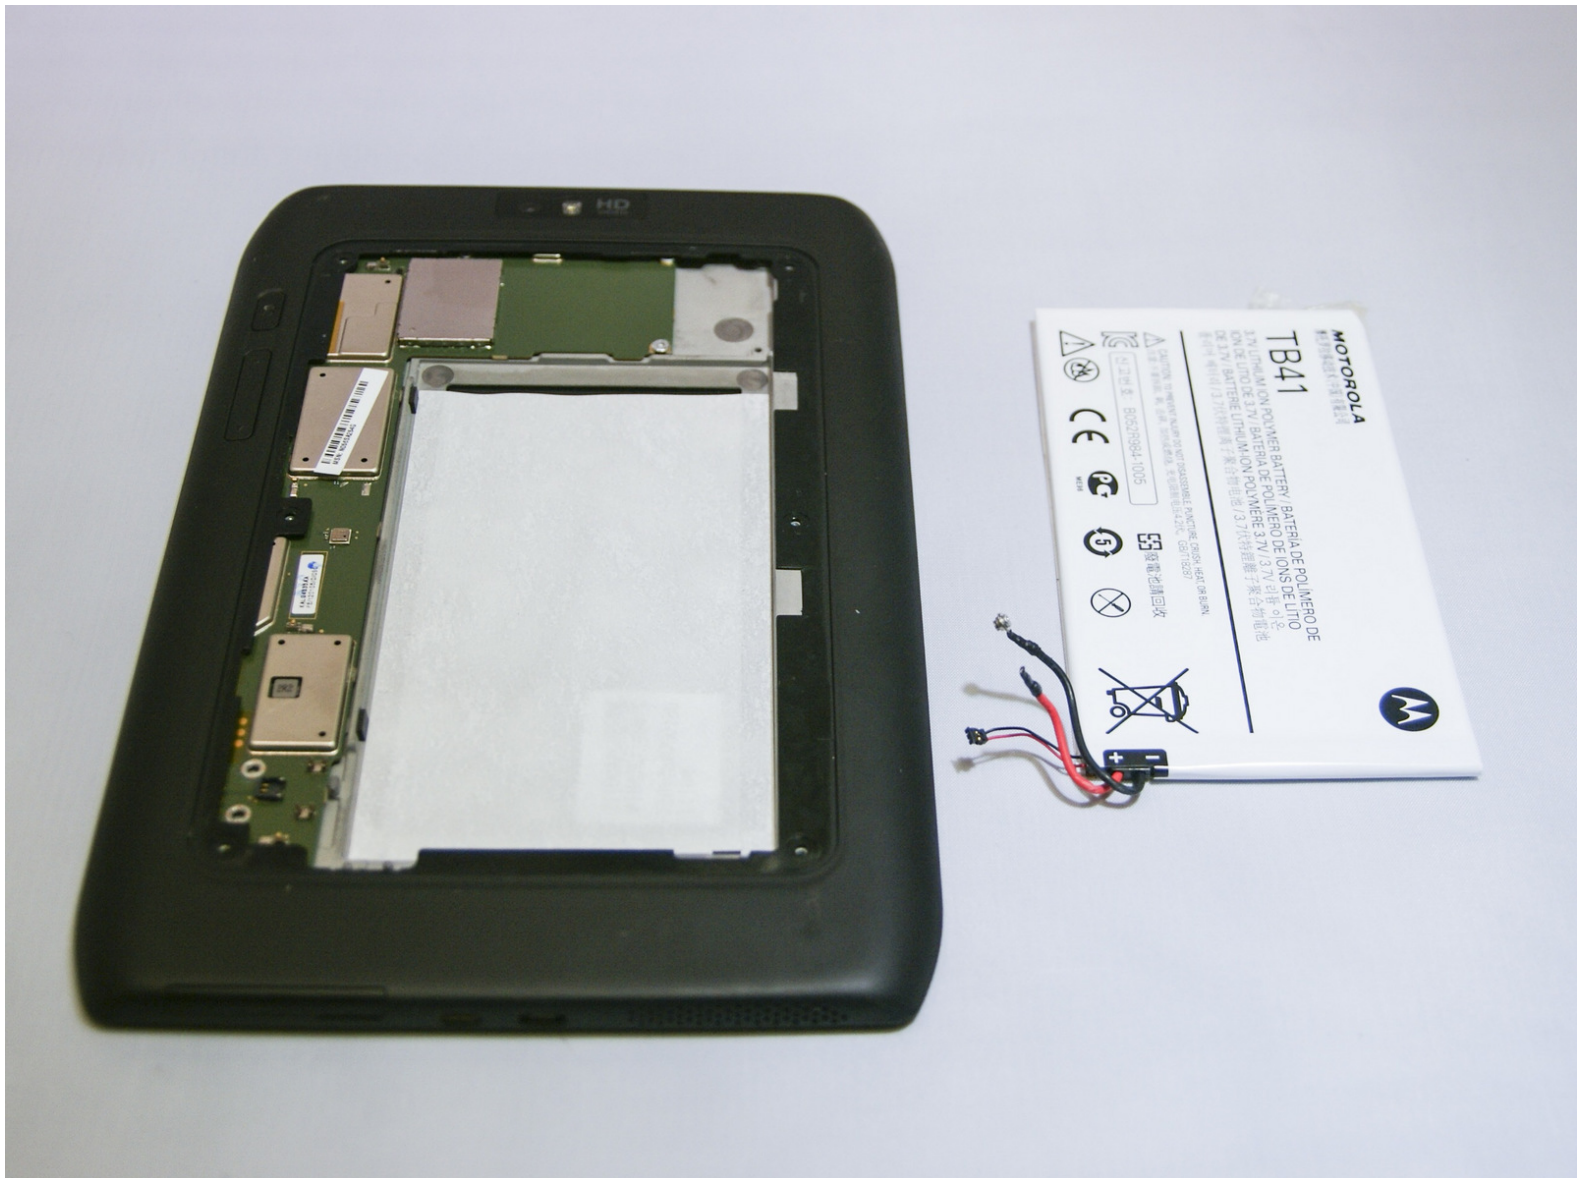

---

## INTRODUCTION

Having troubles charging, holding a charge or keeping your device powered on? This guide will help you replace your battery. You will need to purchase a new battery before beginning.

---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [T3 Torx Screwdriver](#) (1)
  - [T5 Torx Screwdriver](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Battery



**i** Power off your tablet before beginning disassembly.

- Remove six 2.74mm Torx #3 screws from the back panel of the device with a Torx T3 screwdriver.

## Step 2




**!** There is adhesive attached to the underside of the back panel. Gradually lift panel to avoid bending it out of shape.

- Pry off the back panel with a plastic opening tool.




## Step 3

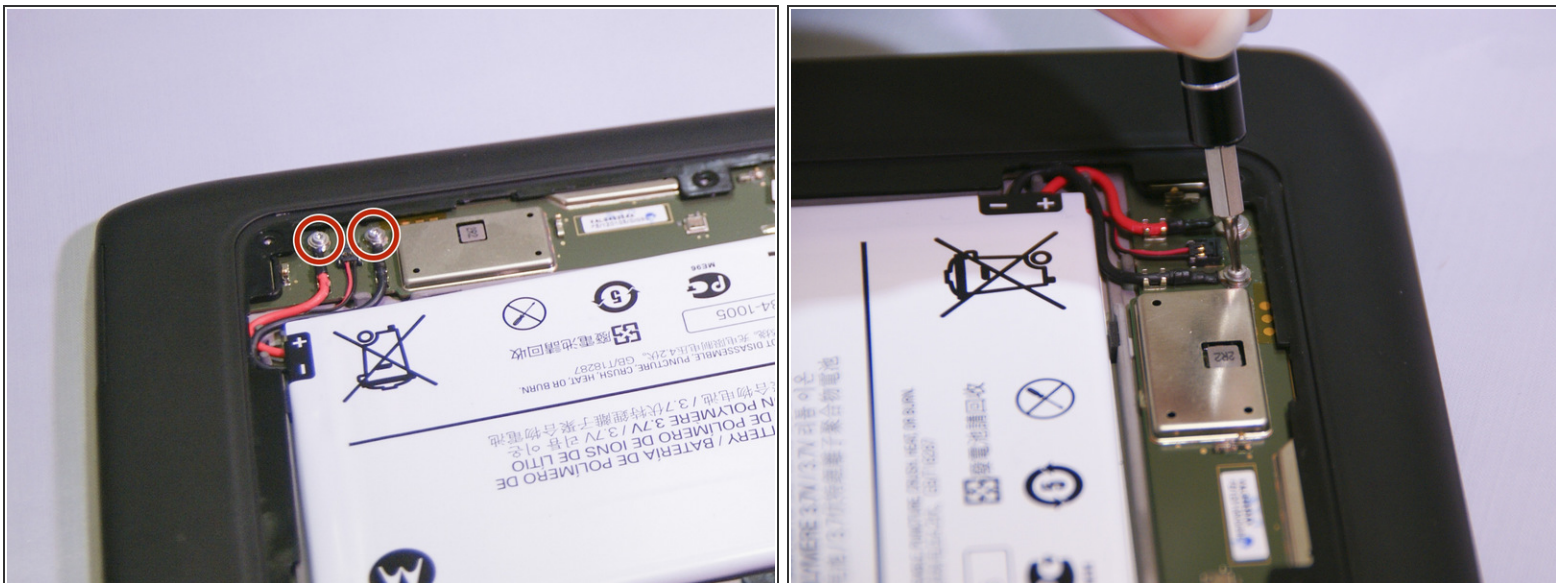

- ⚠ These screws are tight and prone to becoming stripped.
- ⚠ The battery cables are likely to snap when removing the screws.


- Remove two 2.38mm Torx #5 screws from battery cables with Torx T5 screwdriver.

## Step 4

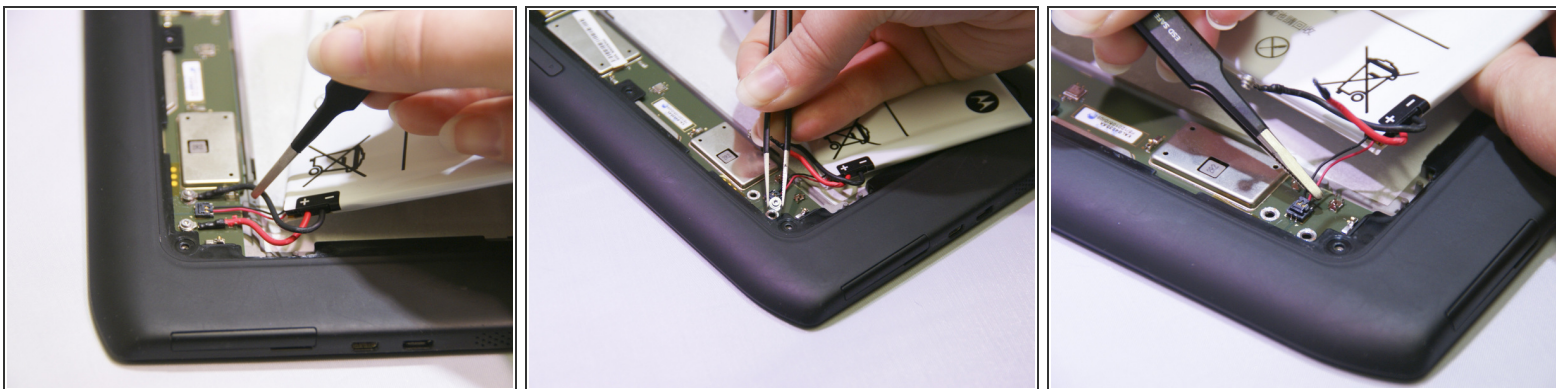

- Pull up the battery cables and battery chip with tweezers.

## Step 5

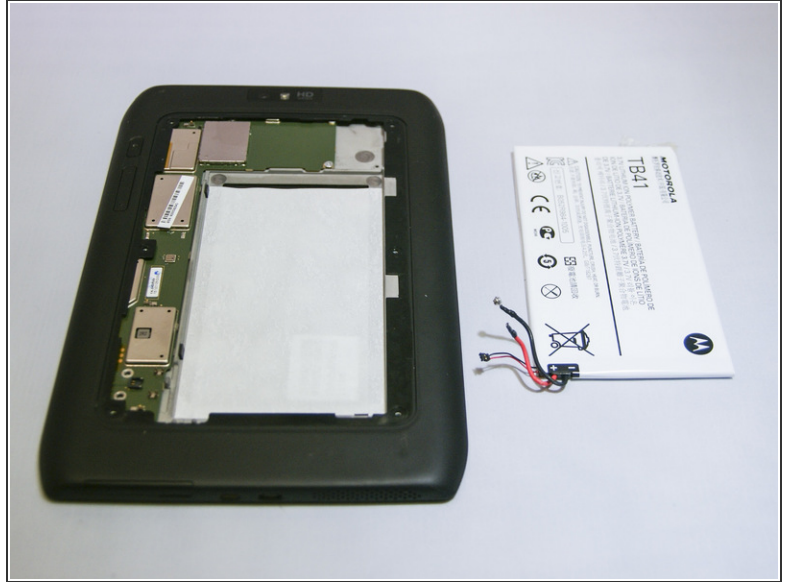

- Pry the battery out of the device with the plastic opening tool.
- ☛ Some force is needed to lift the battery up because of the adhesive attached to the backside of the battery.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 02:42:14 AM.